


Joker.

The cards have been reshuffled.



Joker 6003

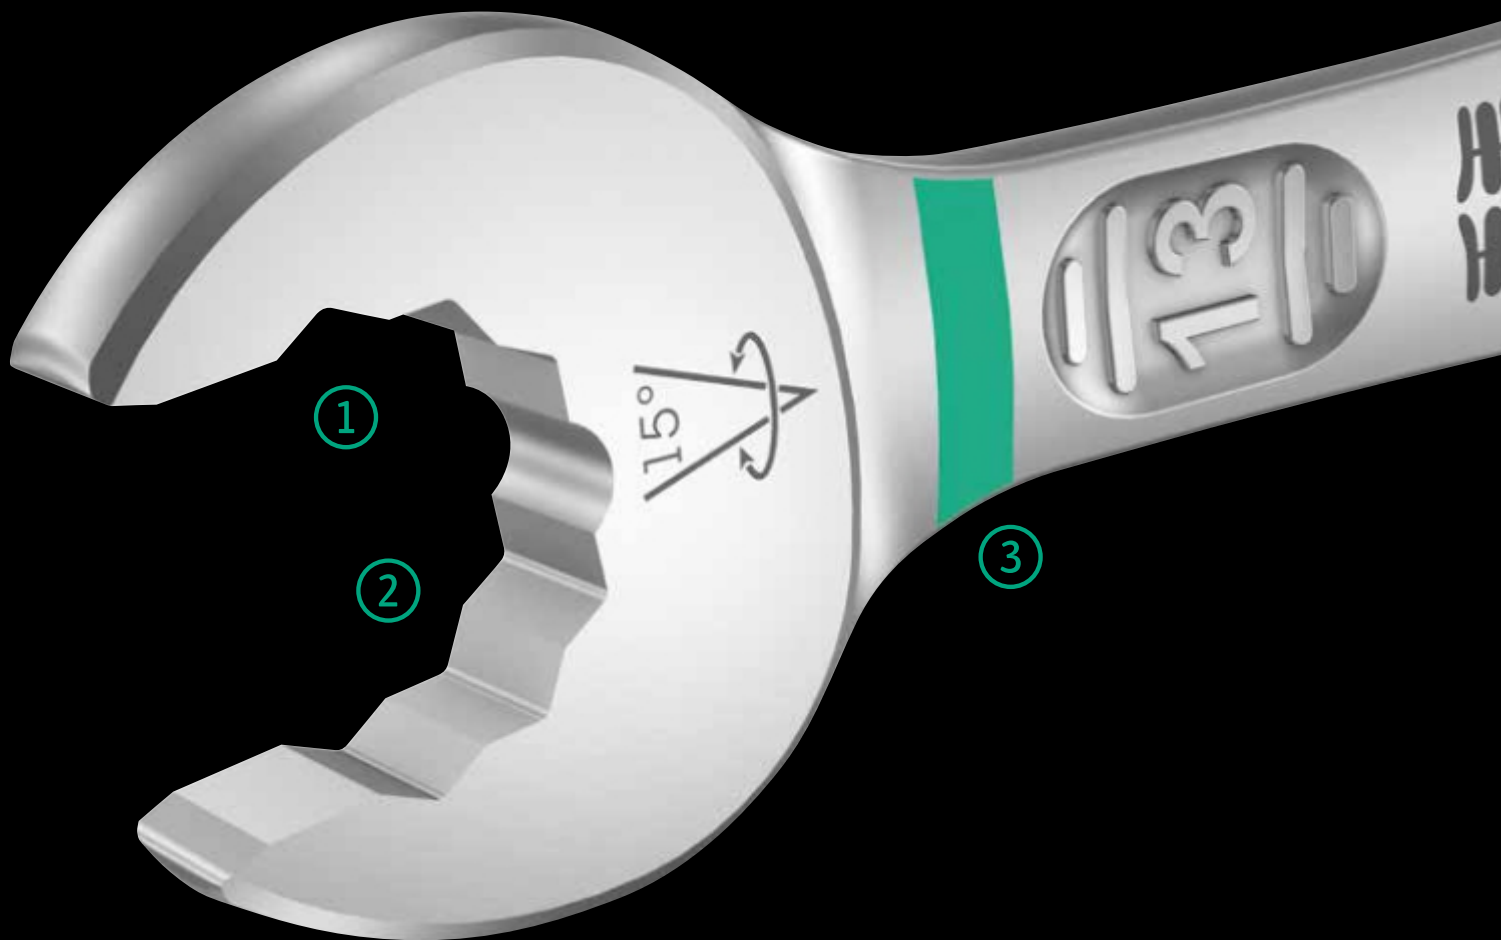

As the installation space becomes increasingly tight during screwdriving, it remains necessary that tools evolve to enable users to work successfully. Narrow spaces require additional placement points of the tool. Can spanners be modified so that the placement possibilities of the tool increase?

The combination of the 7.5° pivoted mouth and the double hexagon geometry doubles the placement points. A repeated 180° turn of the wrench around the longitudinal axis during screwdriving provides four placement possibilities, and bolts or screw heads can be "taken" every 15°.

The Joker 6003 with its smart mouth geometry significantly expands the range of uses in confined spaces. The Joker 6003 will automatically find the respective placement point after every turn.

The slim yet robust ring side is angled by 15° to the tool axis. The high-quality surface treatment achieves a high and long-lasting corrosion protection.

With Take it easy tool finder: colour coding by size.




① For very tight spaces



The Joker 6003 ring spanner with its special mouth geometry - a mouth side pivoted by 7.5° and the double hexagon geometry - doubles the placement possibilities when repeatedly turning the wrench 180° around the longitudinal axis. Bolts and screw heads can be "taken" every 15°. The

Joker 6003 will automatically find the respective placement point after every turn.

③ "Take it easy" tool finder




"Take it easy" tool finder system - with profile and size colour-coding for quick and easy tool selection. Colour-coded system for hexagon drive screws (L-Keys, Zyklop bit sockets), external hex drive screws and nuts (Joker wrenches, Zyklop sockets and Zyklop bit sockets with holding function), and TORX® drive screws (L-Keys, Zyklop bit sockets).

② For pivoting angles under 30°



Thanks to the mouth side pivoted by 7.5°, double hexagon geometry and an adjusted application method (placement - screwdriving - turning - replacement - screwdriving - turning, etc), even screwdriving challenges allowing a pivoting angle of less than 30° can be solved.


④ Angled ring side



The ring side is angled at 15° to the tool axis to prevent injury.





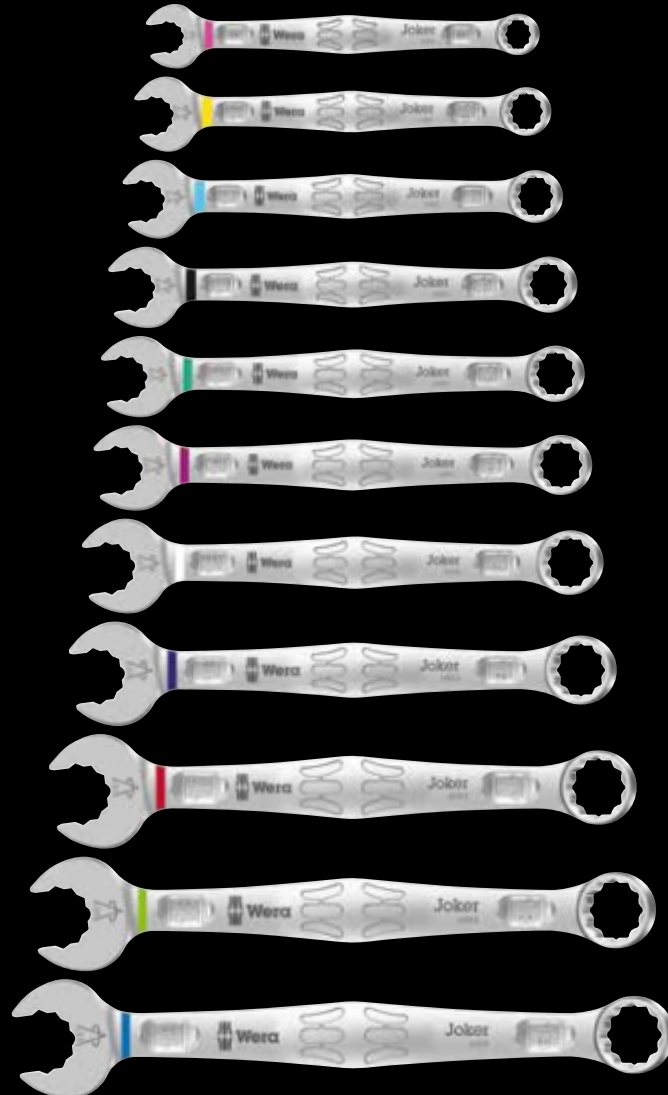










Joker 6003 – assortment

6003 Joker ring spanner



Application: hexagon screw heads and bolts

Design: ring spanner; mouth side pivoted by 7,5°, ring side pivoted by 15°; With Take it easy tool finder: Colour coding by size

						
		mm	mm	mm	mm	mm
05020200001		8	115	19	4,5	12,5
05020201001		10	125	22	5	15
05020202001		11	135	24,5	5	17
05020203001		12	148	26	5,5	18
05020204001		13	160	27	6	19
05020205001		14	167	29	6	20
05020206001		15	174	32	6	22
05020207001		16	182	35	6,5	23
05020208001		17	190	38	6,5	24,5
05020209001		18	210	39	7,5	26
05020210001		19	230	42	7,5	27,5



Wera Werkzeuge GmbH
Korzerter Straße 21-25
D-42349 Wuppertal
Germany


Phone: +49 (0)2 02 / 40 45-0
Fax: +49 (0)2 02 / 40 45 276
E-Mail: info@wera.de
www.wera.de

Wera Tools Inc. (North America)
4129 Harvester Rd, Unit H
Burlington, Ontario
Canada, L7L 5M3

Phone: 1-800-267-55 41
E-Mail: info@weratools.com
www.weratools.com

Wera Tools (UK) LTD.
Railway View
Clay Cross
Chesterfield, Derbyshire, S45 9FR

Phone: +44 (0)1246 / 277756
Fax: +44 (0)1246 / 273335
eMail: queries@wera-tools.co.uk
www.wera-tools.co.uk



EN 05 510085 001 - 0056294 - 03